




CATENE A RULLI CON PIASTRE A PROFILO DIRITTO - DIN 8187 - ISO 606

ROLLER CHAINS WITH STRAIGHT PLATES - DIN 8187 - ISO 606

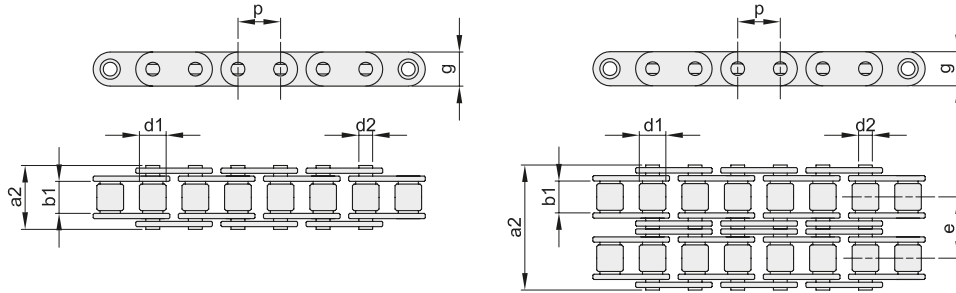

CATENA PRODOTTA DA AZIENDA CERTIFICATA ISO 9001 - ISO 14001 E API 7F
CHAIN PRODUCED BY ISO 9001 - ISO 14001 AND API 7F CERTIFIED COMPANY

CATENA PRESTIRATA / PRE-STRETCHED CHAINS



CONFEZIONI DA 5 MT

SEMPLICE

ISO	codice	p		b ₁ mm min.	d ₂ mm	d ₁ mm max.	a ₂ mm max.	g mm max.	Carico di rottura		q kg/m ≈
		mm	inch						minimo KN	medio KN	
08B-1	601112000	12,7	1/2"	7,75	4,45	8,51	17,0	11,8	18,0	21,1	0,75
10B-1	601115000	15,875	5/8"	9,65	5,08	10,16	19,6	14,7	22,4	27,4	0,98
12B-1	601119000	19,05	3/4"	11,68	5,72	12,07	22,7	16,1	29,0	32,3	1,24
16B-1	601125000	25,4	1"	17,02	8,28	15,88	36,1	20,6	60,0	70,6	3,30
20B-1	601131000	31,75	1" 1/4	19,56	10,19	19,05	43,2	26,4	95,0	109,8	3,91

DOPPIA

ISO	codice	p		b ₁ mm min.	d ₂ mm	d ₁ mm max.	a ₂ mm max.	g mm max.	e mm	Carico di rottura		q kg/m ≈
		mm	inch							minimo KN	medio KN	
10B-2	601115200	15,875	5/8"	9,65	5,08	10,16	36,2	14,7	16,59	44,5	57,3	1,97
12B-2	601119200	19,05	3/4"	11,68	5,72	12,07	42,2	16,1	19,46	57,8	65,7	2,27
16B-2	601125200	25,4	1"	17,02	8,28	15,88	68,0	20,6	31,88	113,7	137,5	5,78
20B-2	601131200	31,75	1" 1/4	19,56	10,19	19,05	79,7	26,4	35,45	170,0	210,0	7,72





CATENE A PERNI FORATI - DIN 8187 - ISO 606

HOLLOW PINS CHAINS - DIN 8187 - ISO 606



TIPO A - A BUSSOLA

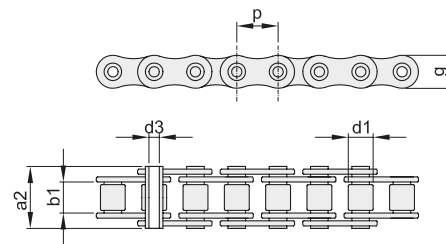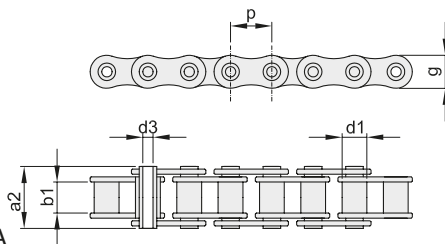

TIPO B - A RULLI

CATENA PRODOTTA DA AZIENDA CERTIFICATA ISO 9001 - ISO 14001 E API 7F
CHAIN PRODUCED BY ISO 9001 - ISO 14001 AND API 7F CERTIFIED COMPANY

CATENA PRESTIRATA / PRE-STRETCHED CHAINS




CONFEZIONI DA 5 MT

ISO	codice	p		b ₁ mm min.	d ₃ mm	d ₁ mm max.	a ₂ mm max.	g mm max.	Carico di rottura		q kg/m ≈	TIPO
		mm	inch						minimo KN	medio KN		
08B-1	601512000	12,7	1/2"	7,75	4,50	8,51	17,0	11,6	9,3	12,8	0,58	A
10B-1	601515000	15,875	5/8"	9,65	5,18	10,16	19,6	14,7	12,7	16,4	0,73	A
12B-1	601519000	19,05	3/4"	11,68	5,85	12,07	22,7	15,9	12,7	17,5	1,10	A
08B-1	601612000	12,7	1/2"	7,75	4,50	8,51	17,0	11,6	10,8	17,4	0,58	B
10B-1	601615000	15,875	5/8"	9,65	5,18	10,16	19,6	14,5	14,7	19,7	0,77	B
12B-1	601619000	19,05	3/4"	11,68	5,85	12,07	22,7	15,9	16,7	23,3	0,98	B
16B-1	601625000	25,4	1"	17,02	8,33	15,88	36,1	20,5	32,7	41,0	2,21	B



GIUNTI E FALSE PER CATENA "BEA" CONNECTING LINK AND OFFSET LINK FOR ROLLER CHAINS "BEA"

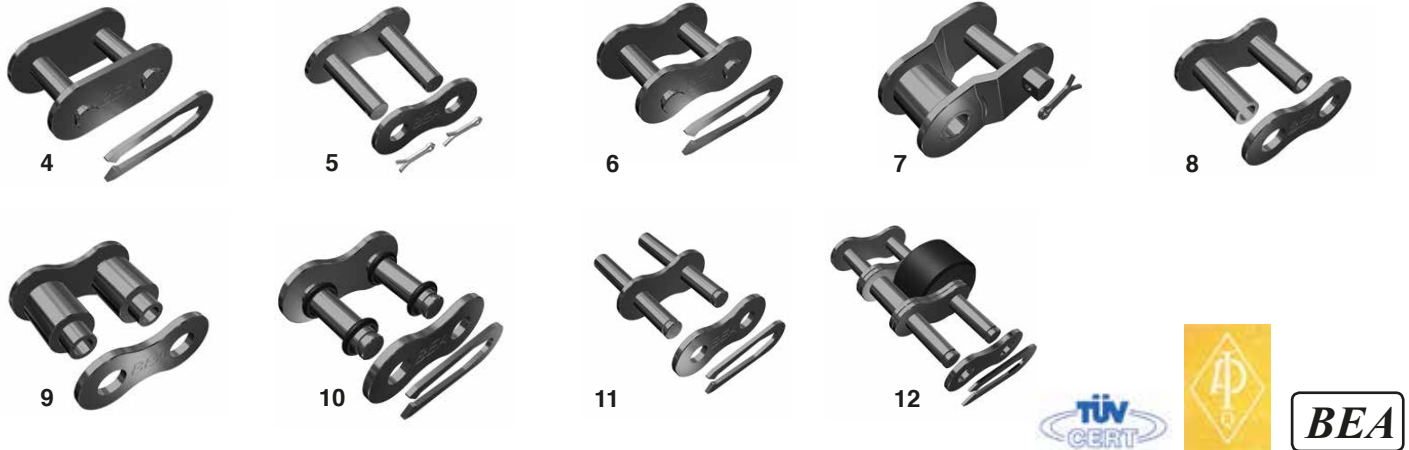

Descrizione ISO	p mm	PIASTRE A PROFILO DIRITTO GIUNTI		FALSE	
		tipo	codice	tipo	codice
08B-1	12,7	4	611112026		
10B-1	15,875	4	611115026		
10B-2	15,875	4	611115226		
12B-1	19,05	4	611119026		
12B-2	19,05	4	611119226		
16B-1	25,4	4	611125026		
16B-2	25,4	4	611125226		
20B-1	31,75	5	611131026		
20B-2	31,75	5	611131226		

Descrizione ISO	p mm	NICHELATA GIUNTI		FALSE	
		tipo	codice	tipo	codice
06B-1	9,525	6	646109026	7	646109059
06B-2	9,525	6	646109226	7	646109259
08B-1	12,7	6	646112026	7	646112059
08B-2	12,7	6	646112226	7	646112259
10B-1	15,875	6	646115026	7	646115059
10B-2	15,875	6	646115226	7	646115259
12B-1	19,05	6	646119026	7	646119059
12B-2	19,05	6	646119226	7	646119259
16B-1	25,4	6	646125026	7	646125059
16B-2	25,4	6	646125226	7	646125259

Descrizione ISO	p mm	PERNO FORATO TIPO "A" - A BUSSOLA GIUNTI		FALSE	
		tipo	codice	tipo	codice
08B-1	12,7	8	611512026		
10B-1	15,875	8	611515026		
12B-1	19,05	8	611519026		

Descrizione ISO	p mm	PERNO FORATO TIPO "B" - A RULLI GIUNTI		FALSE	
		tipo	codice	tipo	codice
08B-1	12,7	9	611612026		
10B-1	15,875	9	611615026		
12B-1	19,05	9	611619026		
16B-1	25,4	9	611625026		

Descrizione ISO	p mm	AUTOLUBRIFICATA GIUNTI		FALSE	
		tipo	codice	tipo	codice
08B-1	12,7				
10B-1	15,875				
12B-1	19,05				

Descrizione ISO	p mm	"O-RING" GIUNTI		FALSE	
		tipo	codice	tipo	codice
08B-1	12,7	10	644112026		
10B-1	15,875	10	644115026		

Descrizione ISO	p mm	PERNI SPORGENTI GIUNTI		FALSE	
		tipo	codice	tipo	codice
06B-1	9,525	11	615109026		
08B-1	12,7	11	615112026		
10B-1	15,875	11	615115026		
12B-1	19,05	11	615119026		
16B-1	25,4	11	615125026		

Descrizione ISO	p mm	ACCUMULO GIUNTI		FALSE	
		tipo	codice	tipo	codice
12B-3	19,50	12	612119026		